

TRANSFER SWITCHES

RTS Automatic Smart Transfer Switch

600 - 800 Amps, 1-phase & 3-phase



*Built in the USA using domestic and foreign parts

FEATURES

- **600-800 amp RTS transfer switches** are compatible with the full 22-150kW line of liquid-cooled generators. The switches are open transition and are available in 120/240 1 ϕ , 120/208 3 ϕ , 120/240 3 ϕ , and 277/480 3 ϕ .
- **600-800 amp RTS transfer switches** are housed in a steel NEMA/UL Type 3R enclosure, with electrostatically applied and baked powder paint. The heavy duty Generac® Contactor is a UL recognized device, designed for years of service. The controller at the generator handles all the timing, sensing and exercising functions.
- **DPM Technology (single phase switches only)** Through the use of digital power technology (DPM), each of these switches have the capability to manage up to 4 individual HVAC (24V controlled) loads with no additional hardware. When used in tandem with Smart Management modules, up to 8 more loads can be managed as well, providing the most installation efficient power management options available.

FUNCTIONS

All Timing and sensing functions originate in the generator controller

• Utility voltage drop-out	<60%
• Timer to generator start	5 second factory set, adjustable between 2-1500 seconds by a qualified dealer*
• Engine warm up delay	5 seconds
• Utility voltage pickup	>90%
• Re-transfer time delay	15 seconds
• Engine cool-down timer	60 seconds**
• Exerciser	12 minutes every 7 days

The transfer switch can be operated manually without power applied.

*When used in conjunction with a unit utilizing Sync 2.0™ controls

**Default settings may vary by model, see owner's manual for settings

SPECIFICATIONS

Model	RTSK600A3	RTSZ600G3	RTSZ600J3	RTSZ600K3	RTSK800A3	RTSZ800G3	RTSZ800J3	RTSZ800K3
Amps	600				800			
Voltage	120/240 1Ø	120/208 3Ø	120/240 3Ø	277/480 3Ø	120/240 1Ø	120/208 3Ø	120/240 3Ø	277/480 3Ø
Load Transition Type (Automatic)	Open Transition							
Enclosure Type	NEMA/UL 3R							
Withstand Rating (Amps)	42,000				65,000			
Lug Range	1/0 - 500 MCM				4/0 - 500 MCM			


DIMENSIONS

Voltages**	Height (in./mm)		Width (in./mm)		Depth (in./mm)	Weight (lbs/kilos)
	H1	H2	W1	W2		
120/240 1Ø, 120/208 3Ø, 120/240 3Ø	61.4/1559.6	66/1676.4	30/762	36/914.4	21/533.4	337.5/153.09
277/480 3Ø	61.4/1559.7	66/1676.5	30/763	36/914.5	21/533.5	353.5/160.34

**Includes 600 & 800 amp switches

TRANSFER SWITCH FEATURES

- Electrically operated, mechanically-held contacts for fast, positive connections.
- Rated for all classes of load, 100% equipment rated, both inductive and resistive.
- 160 millisecond transfer time.
- Dual coil design.
- Main contacts are silver plated or silver alloy to resist welding and sticking.
- NEMA/UL 3R (indoor/outdoor rated) steel enclosure is standard.
- Limited 5 Year Warranty.

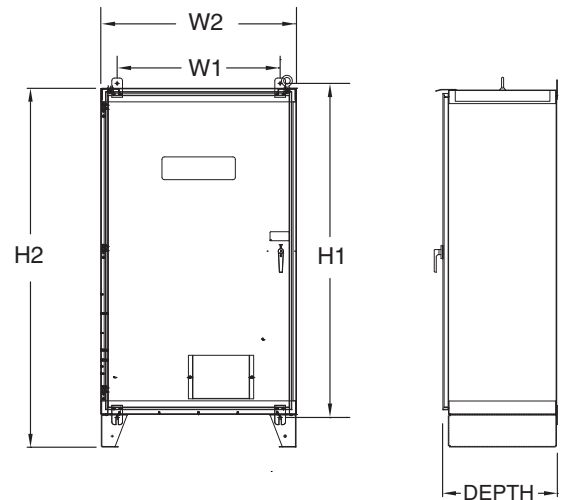

Generac Power Systems, Inc.

S45 W29290 Hwy. 59

Waukesha, WI 53187

Tel: 1-855-GEN-INFO

honeywellgenerators.com

OL3208-A

May 2015

© Generac Power Systems, Inc. All rights reserved.
Specifications subject to change without notice.

The Honeywell Trademark is used under
license from Honeywell International Inc.

Honeywell International Inc. makes no representation
or warranties with respect to this product.

Honeywell